



# HCD 660


## Features

- Temperature stability down to 5ppb
- Single 12V supply (15V ~ 30V optional)
- Standard European pin-out
- Custom options available

## Standard Models

The table below shows the most common models; in most cases selecting one of these will ensure best combination of price, performance and availability.

Product Code	Freq	Ageing per day	Temp stability
HCD660/DRFN	5.0MHz	$< 1 \times 10^{-9}$	$< 1 \times 10^{-8}$ -20+70°C
HCD660/FTFN	5.0MHz	$< 2 \times 10^{-10}$	$< 3 \times 10^{-8}$ -20+70°C
HCD660/DrFN	10.0MHz	$< 1 \times 10^{-9}$	$< 1 \times 10^{-8}$ -20+70°C
HCD660/FTFN	10.0MHz	$< 2 \times 10^{-10}$	$< 3 \times 10^{-8}$ -20+70°C

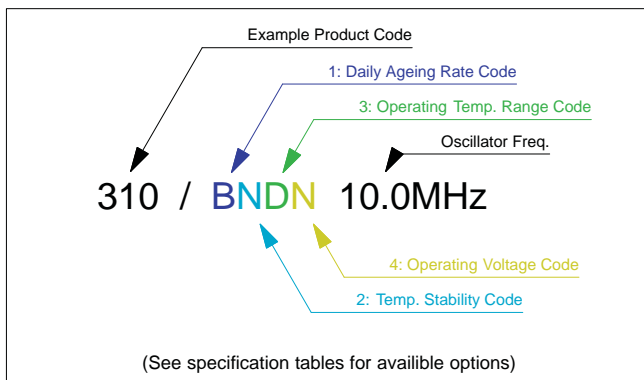

Parameters HCD660		Standard / Optional	Code
Frequency range:	5.0 ~ 20.0MHz	Standard	
Ageing per day (at dispatch):	$< 1 \times 10^{-9}$	Optional	D
	$< 5 \times 10^{-10}$	Optional	E
	$< 2 \times 10^{-10}$	Standard	F
	$< 1 \times 10^{-10}$	Optional	G
Frequency stability:	$< 1 \times 10^{-7}$ per year (option D)	Optional	
	$< 1 \times 10^{-8}$ per year (option F)	Optional	
	$< 1 \times 10^{-9}$ per 10% change $V_{DD}$	Standard	
	$< 5 \times 10^{-10}$ per 10% change load	Standard	
Temperature stability:	$< 1 \times 10^{-8}$	Standard	R
	$< 5 \times 10^{-9}$	Optional	S
	$< 3 \times 10^{-9}$	Standard	T
Operating temperature range:	-10 to +60°C	Optional	C
	-20 to +70°C	Standard	F
	-40 to +70°C	Optional	G
Storage temp:	-40 to +90°C	Standard	
Output waveform:	Sine wave, 7dBm ( $\pm 2$ dBm) into 50 $\Omega$	Standard	
	Other options to +13dBm max	Optional	specify
Frequency adjustment:	$\pm 5 \times 10^{-7}$ (typ) over +0.5 to +7.0V (sufficient for 10 years ageing min) Stabilised +7.0V supply provided	Standard	
Supply Voltage ( $V_{DD}$ ):	+12.0V ( $\pm 0.5$ V)	Standard	N
	+15.0V ( $\pm 0.5$ V)	Optional	P
	Other options from 12 - 30V	Optional	specify
Power consumption:	5W max at switch on	Standard	
	1.2W typ (stabilised at 25°C)	Standard	
Warm up:	$< \pm 1 \times 10^{-8}$ after 10mins at +20°C	Standard	
Allan deviation (ADEV), 1sec:	$< 5 \times 10^{-13}$ (5.0MHz)	Standard	
	$< 1 \times 10^{-12}$ (10.0MHz)	Standard	
Close-in phase noise (@5MHz):	$< -110$ dBc/Hz @1Hz, $< -135$ @10Hz	Standard	
	$< -123$ dBc/Hz @1Hz, $< -140$ @10Hz	Optional	Z
	$< -150$ dBc/Hz @ 100Hz	Standard	
Close-in phase noise (@10MHz):	$< -95$ dBc/Hz @ 1Hz, $< -130$ @10Hz	Standard	
	$< -108$ dBc/Hz @1Hz, $< -135$ @10Hz	Optional	Z
	$< -145$ dBc/Hz @ 100Hz	Standard	
Far-out phase noise (all frequencies):	$< -155$ dBc/Hz @ 1kHz	Standard	
	$< -157$ dBc/Hz @ 10kHz	Standard	
	$< -157$ dBc/Hz @ 100kHz	Standard	
Harmonics:	$< -30$ dB wrt carrier	Standard	

